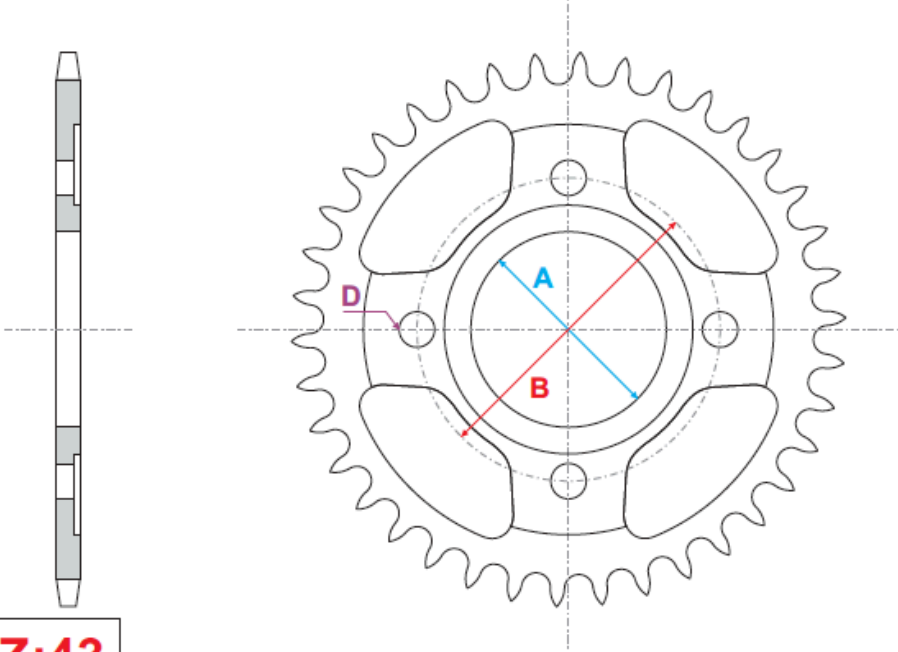


A: Ø INTERIOR	B: Ø E.CENTRO	C: Ø RODILLO	D: Cant.xØAg.	E: PASOxEsp.
<b>58</b>	<b>90</b>	<b>8.51</b>	<b>4x10.5</b>	<b>1/2x5/16</b>
				
<b>CAD.:428</b>	<b>Z:43</b>			

Units for A-B-C-D millimeters // for E inches.

## PARAMETERS

### Protection

YES - PROTECTIVE ANTIRUST OIL

### Treatment

Hardening: YES

Quenching: YES

Tempered: YES

### Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)