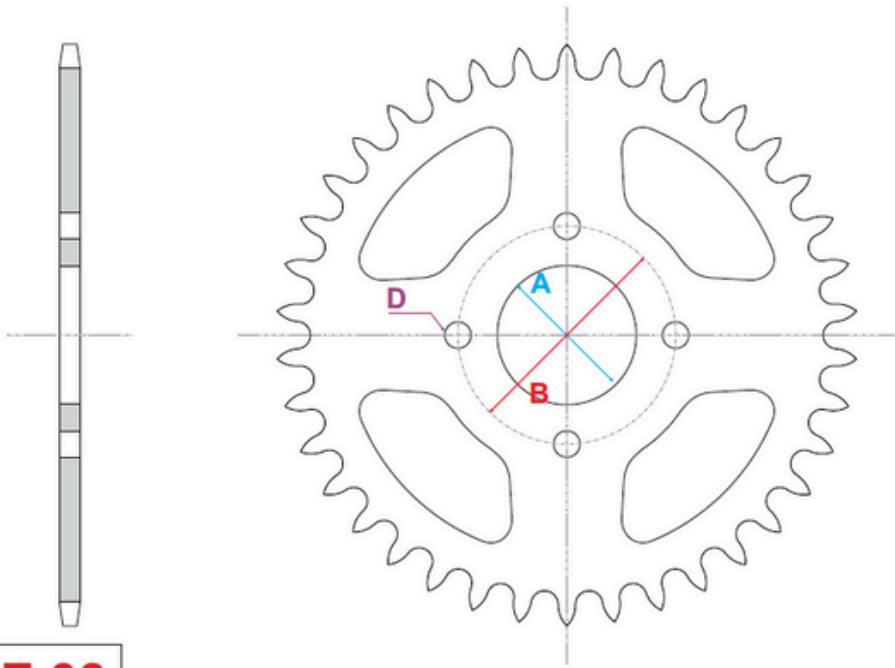


| A: Ø INTERIOR | B: Ø E.CENTRO | C: Ø RODILLO | D: Cant.xØPIV. | E: PASOxEsp. |
|---|---------------|--------------|----------------|-----------------|
| 39.6 | 62 | 7.75 | 4x7.5 | 1/2x3/16 |
|  | | | | |
| CAD.:415 | Z:38 | | | |

Units for A-B-C-D milimeters // for E inches.

PARAMETERS

Protection

NO NEED

Treatment

Hardening: YES

Quenching: YES

Tempered: YES

Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)