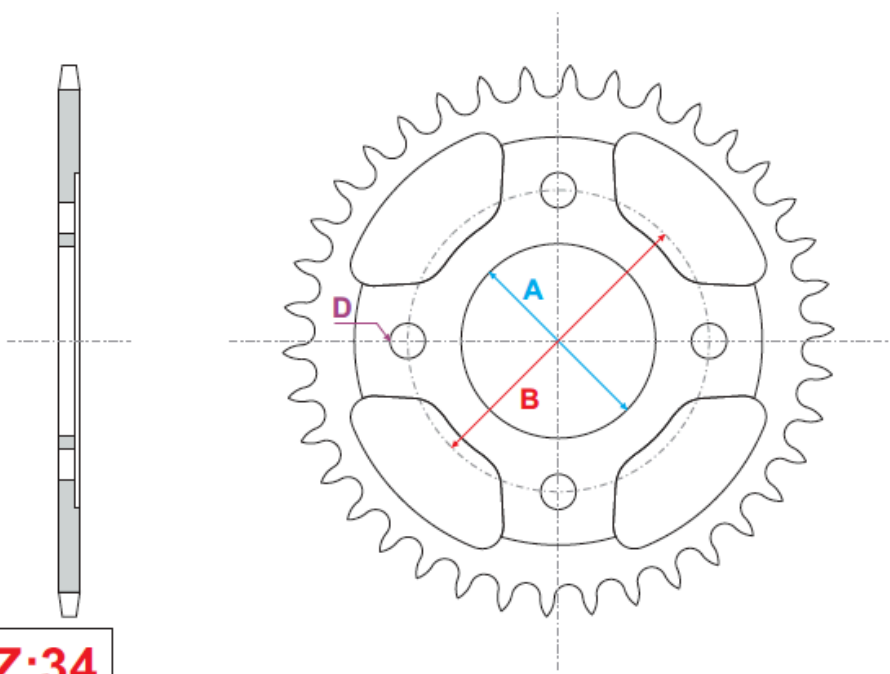


| A: Ø INTERIOR   | B: Ø E.CENTRO | C: Ø RODILLO | D: Cant.xØPIV. | E: PASOxEsp.    |
|---|---------------|--------------|----------------|-----------------|
| <b>54</b>   | <b>70</b>     | <b>8.51</b>  | <b>4x8.5</b>   | <b>1/2x5/16</b> |
|  |               |              |                |                 |
| <b>CAD.:428</b>   | <b>Z:34</b>   |              |                |                 |

Units for A-B-C-D milimeters // for E inches.

## PARAMETERS

### Protection

NO NEED

### Treatment

Hardening: YES

Quenching: YES

Tempered: YES

### Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)