
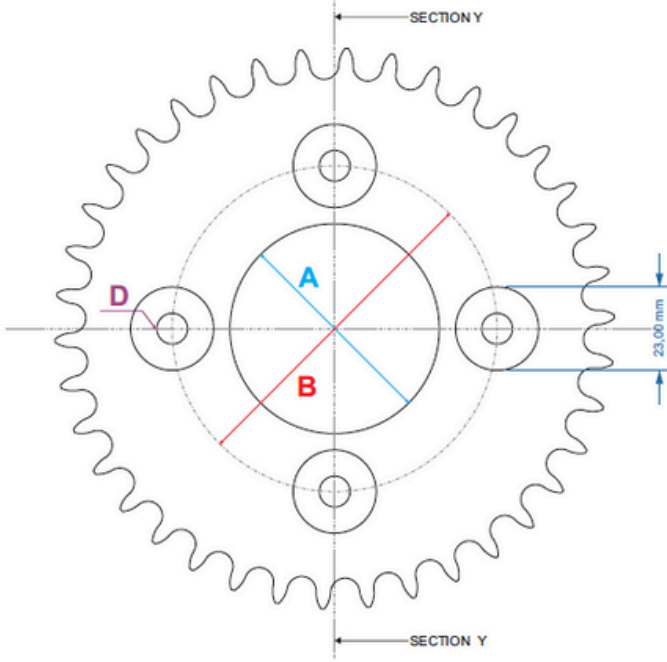


A: Ø INTERIOR	B: Ø E.CENTRO	C: Ø RODILLO	D: Cant.xØPIV.	E: PASOxEsp.
58	90	8.51	4x8.5	1/2x5/16

SECTION Y-Y



SECTION Y



CAD.:428	Z:37
-----------------	-------------

Units for A-B-C-D milimeters // for E inches.

PARAMETERS

Protection

NO NEED

Treatment

Hardening: YES
 Quenching: YES
 Tempered: YES

Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)