


A: Ø INT.	B: Ø EXT.	C: Ø EC.	P x E x Rod.	D: Cant.x Rosc.Ag.	E: N° EsT.xEsp.
<b>16</b>	<b>20</b>	<b>34</b>	<b>5/8x1/4x10.16</b>	<b>2x(RM6x1)</b>	<b>6 x 4</b>

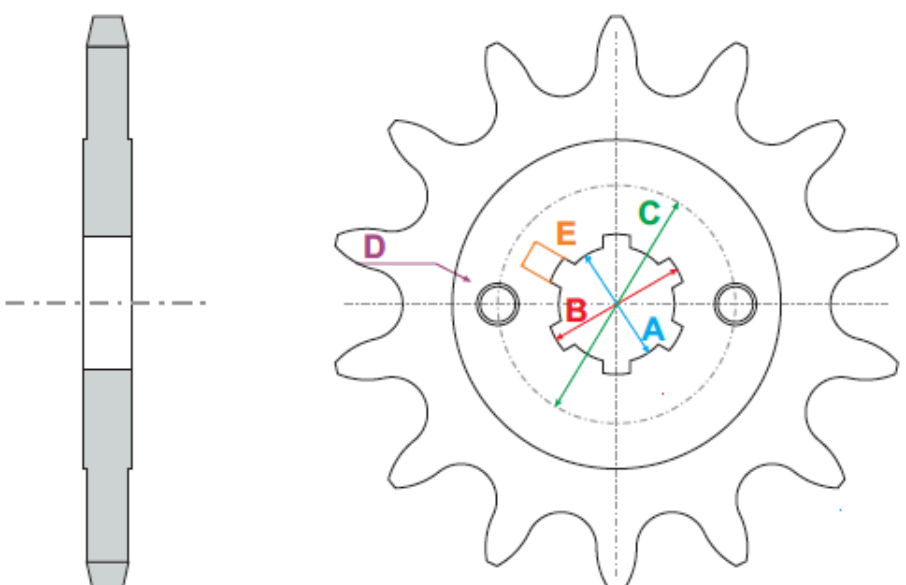

**Z:14**

**CAD.:520**

Units for A-B-C-E-Rod. millimeters  
 Units for P-E- inches

## PARAMETERS

### Protection

YES - PROTECTIVE ANTIRUST OIL

### Treatment

Hardening: YES

Quenching: YES

Tempered: YES

### Hardness:

From 25 HRC minimum to 60 HRC maximum (X value of 10 measures from 0.1 mm to 1.0 mm from the crest)